

Reg. No. :

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Question Paper Code : 20409

B.E./B.Tech. DEGREE EXAMINATION, NOVEMBER/DECEMBER 2018.

Third Semester

Electronics and Communication Engineering

EC 6303 — SIGNALS AND SYSTEMS

(Common to Biomedical Engineering/Medical Electronics)

(Regulations 2013)

(Also Common to PTEC 6303 – Signals and Systems for B.E. (Part-Time) Second Semester Electronics and Communication Engineering Regulations –2014)

Time : Three hours

Maximum : 100 marks


Answer ALL questions.

PART A — (10 × 2 = 20 marks)

1. Compute the average power and energy of the signal $x(t) = r(t) - r(t-2)$, where

$$x(t) = \begin{cases} t; & t \leq 2 \\ 2; & t > 2 \end{cases}$$


2. Plot $x(3-5t)$ for the signal $x(t)$. (Give the sequence of transformation).



3. Consider a periodic signal $x(t)$ with fundamental frequency 2π and $a_0 = 1$, $a_1 = a_{-1} = 1/4$, $a_2 = a_{-2} = 1/2$, $a_3 = a_{-3} = 1/3$. Express $x(t)$ in general Fourier series formula.
4. State Dirichlet's condition of Fourier transform.
5. The impulse response $h[n]$ is given below. Check the system is stable/causal.

$$h[n] = \left[\frac{1}{3}\right]^n u[n].$$

6. The pole zero plot of the transfer function $H(s)$ of a LTI system is given below.

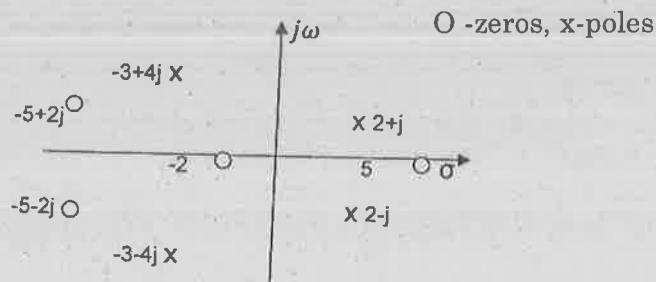


Plot the ROC for the following cases when:

- (a) The system is causal.
 (b) The system is stable.
7. Find the Z-transform of the signal $x[n] = \cos(n\omega T)u[n]$.
8. Find DTFT of the signal $x[n] = \left[\frac{1}{3}\right]^n u[n]$.
9. Find $x(\infty)$ if $X(z)$ is given by $\frac{z+1}{3(z-1)(z+0.9)}$.
10. Consider the second order system function $H(z) = \frac{1}{\left(1 + \frac{1}{2}Z^{-1}\right)\left(1 - \frac{1}{4}Z^{-1}\right)}$
 implement the system in parallel form.

PART B — (5 × 13 = 65 marks)

11. (a) (i) Draw the waveform for the signal $x(t) = u(t) + r(t) - 2r(t-1) + r(t-2) - u(t-2)$, where $u(t)$ and $r(t)$ are unit step and ramp respectively. (3)
- (ii) Determine and sketch the even and odd part of the signal. (3)



- (iii) A continuous time system is given by $y(t) = \int_{-\infty}^{2t} x(t) dt$. Check whether the system is Linear / Time variant / Causal / Static. (7)

Or

- (b) (i) A continuous time system is given by, $y(t) = \begin{cases} 0 & ; x(t) \geq 0 \\ x(t) + x(t-2) & ; x(t) < 0 \end{cases}$

Check whether the system is Linear / Time variant/ Causal/Static. (7)

- (ii) Draw the waveform for the signal $x(t) = r(t) - 2r(t-1) + r(t-2)$. (3)

- (iii) Find whether the signal is periodic or not. (3)

$$x[n] = e^{j\left[\frac{2\pi}{3}\right]n} + e^{j\left[\frac{3\pi}{4}\right]n}$$

12. (a) (i) Find Fourier transform of the signal $x(t) = \begin{cases} 1 & ; |t| < T_1 \\ 0 & ; |t| > T_1 \end{cases}$. (5)

- (ii) Find the Laplace transform of the signal $x(t) = e^{-2t}u(t) + e^{-t}(\cos 3t)u(t)$. (8)

Or .

- (b) (i) Using properties of Fourier transform find $X(j\omega)$ and $G(j\omega)$.


(1) $x(t) = e^{-a|t|} u(t); a > 0$ (3)

(2) $g(t) = 2/(1+t^2)$. (3)


- (ii) Find the Inverse Laplace transform of $X(s)$ (7)

$$X(s) = \frac{3s^2 + 8s + 6}{(s+2)(s^2 + 2s + 1)}$$

13. (a) (i) Find the convolution for the given signals. (7)

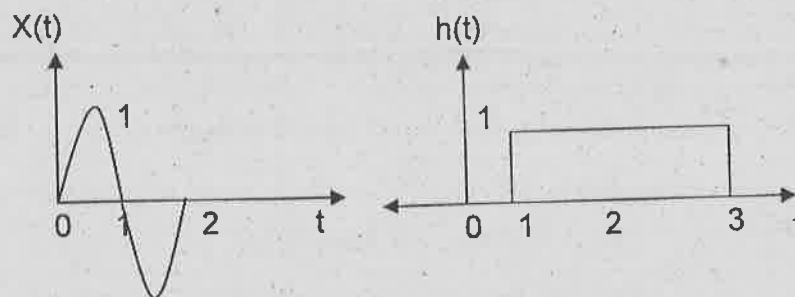


- (ii) Determine the exponential Fourier series representation for the full wave rectified sine wave shown in the figure and also plot the line spectrum. (6)

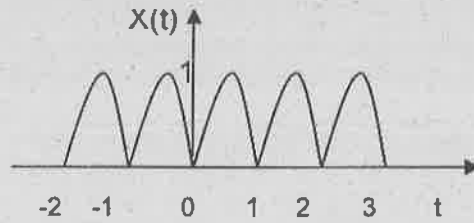


Or

- (b) (i) Find cosine Fourier series of half wave rectified sine function. (8)

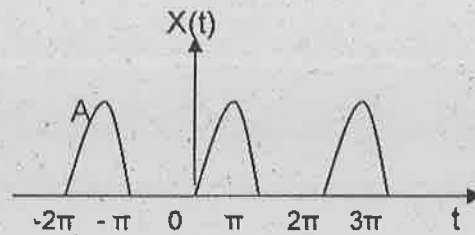

- (ii) Find the convolution between $x[n]$ and $h[n]$, where $x[n] = \alpha^n u[n]$; $0 < \alpha < 1$ and $h[n] = u[n]$. (5)
14. (a) (i) Consider the cascade interconnection of 3 causal LTI system. The impulse response $h_2[n] = u[n] - u[n - 2]$. The overall response is given below. $X[n] \rightarrow h_1[n] \rightarrow h_2[n] \rightarrow h_2[n] \rightarrow y[n]$.

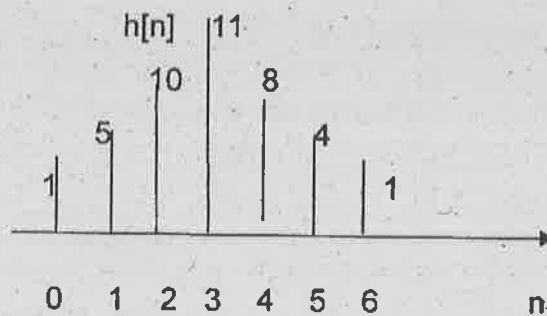

Find the

- (1) impulse response $h_1[n]$ (4)
- (2) The response of the overall system to the input $x[n] = \delta[n] - \delta[n - 1]$. (4)

(ii) Let $h(t)$ be a triangular pulse and let $x(t)$ be the impulse train. Determine and sketch $y(t)$ for the following value of T .

(1) $T = 4$

(2) $T = 2$

(3) $T = 1$

(4) $T = 3/2$. (5)

Or

(b) (i) Using partial fraction method, find the inverse of Z-transform

$$X(z) = \frac{z^2}{(1-az)(z-a)}; \text{Roc} : a < |z| < \frac{1}{a} \quad (7)$$

(ii) Find the discrete time Fourier transform

$$x(n) = (0.5)^n u(n) + 2^n u(-n-1). \quad (3)$$

(iii) Find the frequency response of the causal system. (3)

$$y[n] - \left(\frac{1}{4}\right)y[n-1] - \left(\frac{3}{8}\right)y[n-2] = x[n] + x[n-1].$$

15. (a) (i) Consider a continuous time LTI system,

$$\frac{d^2 y(t)}{dt^2} - \frac{dy(t)}{dt} - 2y(t) = x(t).$$

(1) Find the system function $H(s)$. (3)

(2) Determine the impulse response $h(t)$ for (3)

(A) the system is causal

(B) system is stable

(C) system is neither causal or stable.

(ii) Realize the given system in direct form II

$$\frac{d^3 y(t)}{dt^3} + 4 \frac{d^2 y(t)}{dt^2} + 7 \frac{dy(t)}{dt} + 8y(t) = 5 \frac{d^2 x(t)}{dt^2} + 4 \frac{dx(t)}{dt} + 7x(t). \quad (7)$$

Or

(b) (i) Consider the system $H(z) = \frac{0.2z}{(z+0.4)(z-0.2)}$; $ROC; |z| > 0.4$. (8)

- (1) Find the impulse response function of the system
- (2) Is DTFT exists for the system? if so, how?
- (3) Find the DTFT.

(ii) Obtain the cascade form realization of the system described by the difference equation.

$$y(n) - \frac{1}{4}y(n-1) - \frac{1}{8}y(n-2) = x(n) + 3x(n-1) + 2x(n-2). \quad (5)$$

PART C — (1 × 15 = 15 marks)

16. (a) State and prove the properties of discrete Fourier transform. (15)

Or:

(b) Explain the following :

- (i) Deterministic and random signals. (8)
- (ii) Base band sampling. (7)