

12. (a) (i) The open loop transfer function of the mechanical system is given by $G(s) = \frac{10(s+2)}{s(s+1)(s+3)}$. Find the type of input signal that will provide rise to a constant steady state error and calculate its values. (7)
- (ii) Discuss about PI controller with suitable electronic circuit and derive its transfer function. (6)

Or

- (b) The open loop transfer function of a unity feedback system is given by $G(s) = \frac{25}{s(s+5)}$. Obtain the rise time, peak time and settling time when the system is subjected to unit step input. (13)

13. (a) The open loop transfer function of the system, $G(s) = \frac{1}{s(4s+1)(0.5s+1)}$. Sketch the polar plot and obtain the value of gain margin and phase margin. (13)

Or

- (b) Derive the frequency domain specifications of second order system. (13)

14. (a) (i) The open loop transfer function of feedback control system is given by $G(s) = \frac{K}{(s^2 + 6s + 25)(s^2 + 6s + 8)}$. Using Routh criterion, determine the range of K and frequency of oscillation of the system. (8)

- (ii) Discuss in detail about relative stability in control systems. (5)

Or

- (b) Sketch the root locus plot for the unity feedback system whose open loop transfer function is given by $G(s) = \frac{K}{s(s^2 + 6s + 1)}$. (13)

15. (a) (i) Determine the canonical state model of the system whose transfer function given as $\frac{Y(s)}{U(s)} = \frac{2s+10}{(s+2)(s+3)(s+4)}$. (7)


- (ii) A linear time invariant system is described by the following state model. (6)

$$\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ 1 & 1 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} \text{ and Initial state vector, } X_0 = \begin{bmatrix} 1 \\ 0 \end{bmatrix}$$

Compute the solution of homogeneous state equation.

Or

- (b) Construct the state model of the give mechanical system. (13)

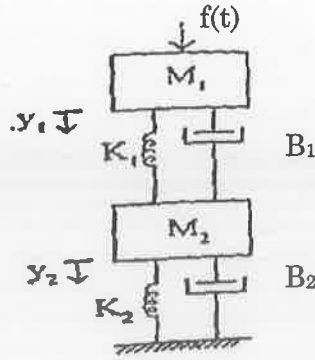

PART C — (1 × 15 = 15 marks)

16. (a) (i) Derive the solutions of Homogeneous state equations. (9)
(ii) Determine the state controllability of the following system. (6)

$$\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \\ \dot{x}_3 \end{bmatrix} = \begin{bmatrix} 0 & 0 & 1 \\ -2 & -3 & 0 \\ 0 & 2 & 3 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} + \begin{bmatrix} 0 \\ 2 \\ 0 \end{bmatrix} u \text{ and } y = [1 \ 0 \ 0] \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix}$$

Or

- (b) A unity feedback system has an open loop transfer function, $G(s) = \frac{K}{s(s+1)}$. Design a suitable phase lead compensator to satisfy the following specifications.
- The phase margin of the system is $\geq 45^\circ$
 - Steady state error for a unit input $\leq 1/15$
 - The gain crossover frequency of the system must be less than 7 rad/sec. (15)